

Meine Fenvi-WLAN-Karte funktioniert nicht mehr. Ventura aktualisiert 13.3.1

Beitrag von „cobanramo“ vom 19. April 2023, 21:54

[Zitat von DejoTaDeEmE](#)

Die Lösung

Update 06 Apr 2023:

This patch has been merged into OpenCore as a new **kernel quirk** named **DisableIoMapperMapping**.

It will be available in May **with OpenCore 0.9.2**.

When the quirk is available, the patches described below may be disabled or deleted.




Problem:

On some systems such as Z390 Designare and Z490 Vision D, WiFi and Ethernet stopped working with macOS Ventura 13.3.

This problem affects all motherboards whose **native DMA remap table (DMAR) contains one or more Reserved Memory Regions**.

Further, this problem occurs only **when AppleVTD is enabled** and **more than 16GB memory** is installed.

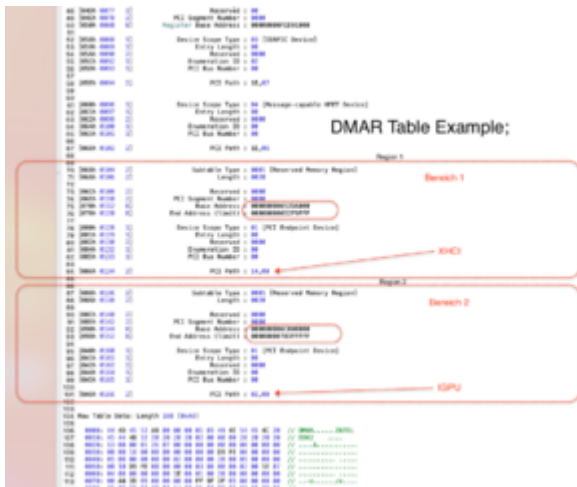

Gruss Coban