

Erledigt

Mojave Installationsprobleme USB Stick nicht erkannt

Beitrag von „Lukaspa“ vom 3. Dezember 2018, 22:56

Moin Moin,

Ich habe gerade folgendes Problem.

Ich wollte mein gut laufendes Mojave neu aufsetzen.

Ich habe Mojave am MacBook heruntergeladen und mit TINU auf den Stick übertragen.


Daraufhin habe ich die neueste Clover Version v2.4k_r.4784 installiert.

Dann noch folgende Kexte Fake.smc und intelmausiethernet in den Others Ordner kopiert.

Soweit so gut.


Wenn ich nun die Installation starte, dann gibt es folgende Fehlermeldung.

siehe fotos

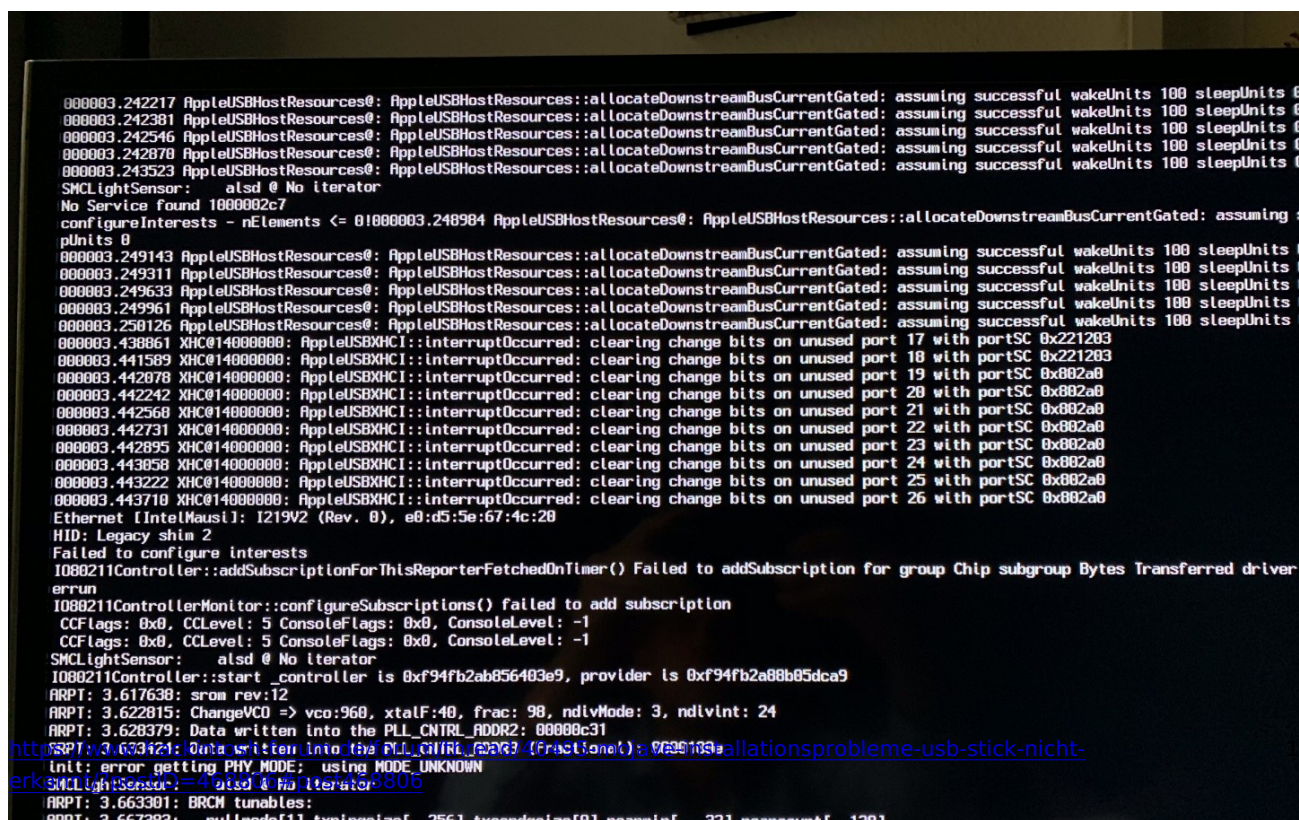

```
000003.242217 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
000003.242381 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
000003.242546 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
000003.242678 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
000003.243523 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
SMCLightSensor: alsd @ No iterator
No Service Found 1000002c7
configureInterests - nElements <= 01000003.248984 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming
pUnits 0
000003.249143 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
000003.249311 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
000003.249633 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
000003.249961 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
000003.250126 AppleUSBHostResources@: AppleUSBHostResources::allocateDownstreamBusCurrentGated: assuming successful wakeUnits 100 sleepUnits 0
000003.430861 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 17 with portSC 0x221203
000003.441589 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 18 with portSC 0x221203
000003.442078 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 19 with portSC 0x802a0
000003.442242 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 20 with portSC 0x802a0
000003.442568 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 21 with portSC 0x802a0
000003.442731 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 22 with portSC 0x802a0
000003.442895 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 23 with portSC 0x802a0
000003.443058 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 24 with portSC 0x802a0
000003.443222 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 25 with portSC 0x802a0
000003.443710 XHC@14000000: AppleUSBXHCI::interruptOccurred: clearing change bits on unused port 26 with portSC 0x802a0
Ethernet [IntelMaui]: I219V2 (Rev. 0), e0:d5:5e:67:4c:20
HID: Legacy shlm 2
Failed to configure interests
IO80211Controller::addSubscriptionForThisReporterFetchedOnTimer() Failed to addSubscription for group Chip subgroup Bytes Transferred driver
errun
IO80211ControllerMonitor::configureSubscriptions() failed to add subscription
CCFLags: 0x0, CCLLevel: 5 ConsoleFlags: 0x0, ConsoleLevel: -1
CCFLags: 0x0, CCLLevel: 5 ConsoleFlags: 0x0, ConsoleLevel: -1
SMCLightSensor: alsd @ No iterator
IO80211Controller::start_controller is 0xf94fb2ab056403e9, provider is 0xf94fb2a80b05dca9
ARPT: 3.617638: srom rev:12
ARPT: 3.622815: ChangeVCO => vco:960, xtalF:40, frac: 98, ndlvMode: 3, ndlvInt: 24
ARPT: 3.628379: Data written into the PLL_CNTRL_ADDR2: 00000c31
init: error getting PHY MODE: using MODE_UNKNOWN
SMCLightSensor:=4 alsd @ No iterator
ARPT: 3.663301: BRCM tunables:
ARPT: 3.667382: euLands[13, txmiscsig, 2561, txsendsig[0], rxmiscsig, 231, rxsendsig, 128]
```

<http://www.nerdsbase.com/2018/12/03/mojave-installationsprobleme-usb-stick-nicht-erkannt/>

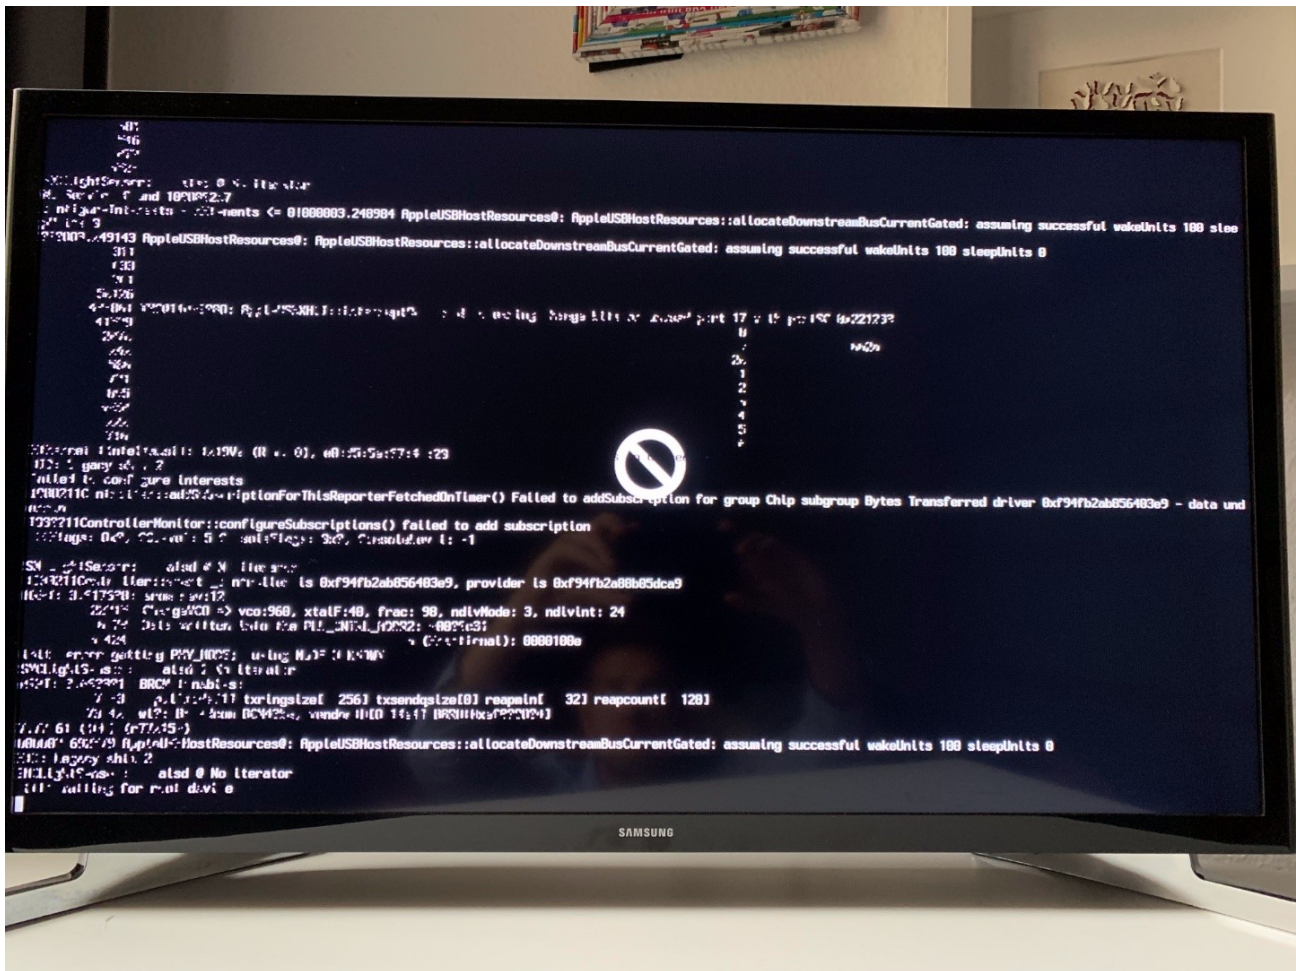

und dann folgt dieses Verbotsschild.

Meine EFI habe ich noch angehängt.

[EFI.zip](#)

Hat jemand einen Tip was schief läuft?

Danke schonmal