


Erledigt


Natives Thunderbolt3 an jedem Rechner

Beitrag von „JimSalabim“ vom 20. März 2020, 17:29

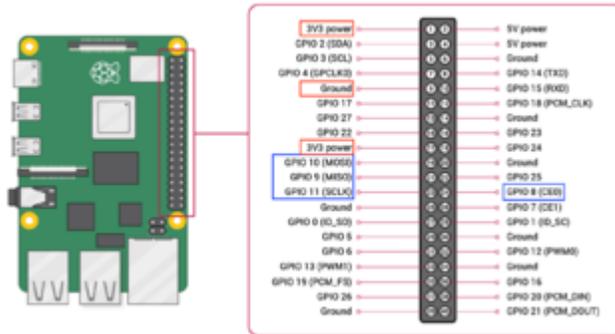

3V-Anschlüsse verwendet, und zwar genau so:

Raspberry Pi (Model 3B or 4)		SOIC8 Clip		Comment
Ground	Pin 9	GND	Pin 4	
3V3 Power	Pin 1	VCC	Pin 8	
3V3 Power	Pin 17	/HOLD /WP	Pin 7 Pin 3	Split the wire from pin 17 into a "Y" so one end connects to Pin 7 and the other to Pin 3 on the SOIC8 clip.
MOSI	Pin 19	DI	Pin 5	
MISO	Pin 21	DO	Pin 2	
SCLK	Pin 23	CLK	Pin 6	
CE0	Pin 24	/CS	Pin 1	

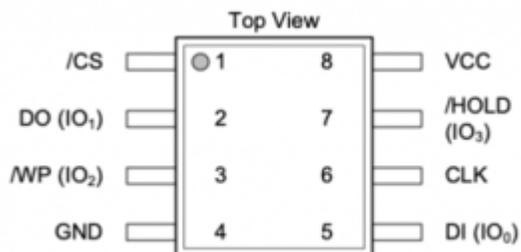

SPI in den Interfacing Options enabled.

Bilder sind aus der Anleitung im CaseySJ-Thread.