


Asus ProArt Z690-Creator WiFi

Beitrag von „al6042“ vom 18. Februar 2023, 22:46

Ein paar Kleinigkeiten musste ich im Nachgang noch einstellen, z.B. die Hardware-Settings der Intel I225-V Netzwerkkarte:

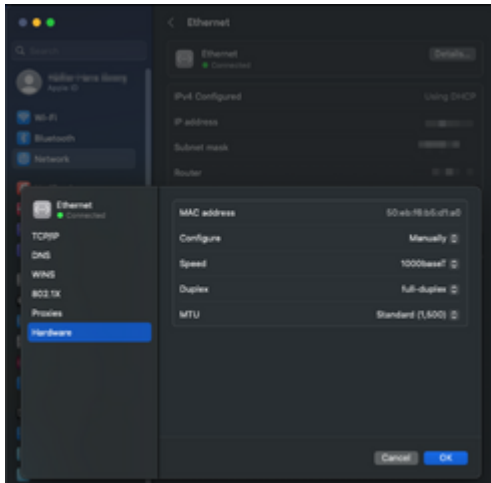

Aber ansonsten schnurrt alles:



C922 Pro Stream Webcam:

Model ID: UVC Camera VendorID_1133 ProductID_2140
 Unique ID: 0x14214000046d085c

iPhone Camera:

Model ID: iPhone14,5
 Unique ID: 46393236-0000-0000-0000-000000000001

Ethernet Devices

Intel Ethernet controller i225-V
 USB 10/100/1000 LAN

Intel Ethernet controller i225-V:

Bus: PCI
 Vendor ID: 0x8086
 Device ID: 0x808615f3
 Subsystem Vendor ID: 0x1043
 Subsystem ID: 0x87d2
 Revision ID: 0x0003
 PCIe Link Speed: 5.0 GT/s
 PCIe Link Width: x1
 Driver: com.apple.driver.AppleIntel210Ethernet
 BSD Device Name: en0
 MAC Address: 50:eb:f6:b5:d1:a0
 AVB Support: No
 Maximum Link Speed: 2.5 Gb/s

AMD Navi 21 [Radeon RX 9600 XT]:

Chipset Model: AMD Navi 21 [Radeon RX 9600 XT]
 Type: GPU
 Bus: PCIe
 Slot: Internal@0,1,0/0,0/0,0/0
 PCIe Lane Width: x16
 VRAM (Total): 16 GB
 Vendor: AMD (0x1002)
 Device ID: 0x73bf
 Revision ID: 0x00c0
 ROM Revision: 113-D4120100-100
 EFI Driver Version: 01.00.3180
 Metal: Supported

Displays:

PHL 499P9:
 Resolution: 5120 x 1440
 UI Looks like: 5120 x 1440 @ 70.00Hz
 Framebuffer Depth: 30-Bit Colour (ARGB2101010)
 Display Serial Number: AU02212013818
 Main Display: Yes
 Mirror: Off
 Online: Yes
 Rotation: Supported
 Connection Type: Thunderbolt/DisplayPort
 Television: Yes

[pasted-from-](#)

[clipboard.png](#)

Der USB-LAN-Port kommt vom Monitor

Card	Type	Driver Installed	Slot
Alder Lake-S HD Audio Controller	Audio device	Yes	Internal@0,31,3
Alder Lake-S PCH HECI Controller #1	Communication controller	No	Internal@0,22,0
Alder Lake-S PCH Serial IO IC Controller #0	Serial bus controller	No	Internal@0,21,0
Alder Lake-S PCH Serial IO IC Controller #1	Serial bus controller	No	Internal@0,21,1
Alder Lake-S PCH Serial IO IC Controller #2	Serial bus controller	No	Internal@0,21,2
Alder Lake-S PCH Shared SRAM	RAM memory	No	Internal@0,20,2
Alder Lake-S PCH SPI Controller	Serial bus controller	No	Internal@0,31,5
Alder Lake-S PCH USB 3.3 Gen 2x2 XHCI Controller	USB controller	Yes	Internal@0,20,8
AMD Navi 21 [Radeon RX 9600 XT]	gpu-controller	Yes	Internal@0,1,0/0,0/0,0/0,1
AMD Navi 21 HDMI Audio	Audio device	Yes	Internal@0,1,0/0,0/0,0/0,1
AMD Navi 21 USB	USB controller	Yes	Internal@0,1,0/0,0/0,0/0,2
AMD Navi 21 USB	Serial bus controller	Yes	Internal@0,1,0/0,0/0,0/0,3
BCM5892 802.11ac Wireless LAN SuC	Network controller	Yes	Internal@0,29,0/0,0
ETD NVMe Controller	Non-Volatile memory controller	Yes	Internal@0,28,0/0,0
ETD NVMe Controller	Non-Volatile memory controller	Yes	Internal@0,28,0/0,0
ExpressCard	USB controller	No	Internal@0,28,0/0,0/0,0/0,8
ExpressCard	USB controller	Yes	Internal@0,28,0/0,0/0,0/0,8
Intel Ethernet controller i225-V	Ethernet controller	Yes	Internal@0,28,0/0,0/0,0,0
NVMe SSD Controller SM981/PM981/PM983	Non-Volatile memory controller	Yes	Internal@0,27,0/0,0
PS Plus NVMe PCIe SSD	Non-Volatile memory controller	Yes	Internal@0,8,0/0,0
Platform Monitoring Technology	Signal processing controller	No	Internal@0,10,0
Volume Management Device NVMe RAID Controller	RAID bus controller	No	Internal@0,14,0

USB Device Tree

- USB 3.1 Bus
- ▼ USB32Bus
 - ▼ 4-Port USB 3.0 Hub
 - ▼ 4-Port USB 3.0 Hub
 - USB 10/100/1000 LAN
 - AURA LED Controller
 - ▼ USB2.0 Hub
 - Bluetooth USB Host Controller
 - GC100
 - Bose QC35 II
 - ▼ 4-Port USB 2.0 Hub
 - ▼ 4-Port USB 2.0 Hub
 - C922 Pro Stream Webcam
 - USB Receiver
 - Trust USB microphone

