OpenCore Sammelthread (Hilfe und Diskussion)

Beitrag von „anonymous_writer“ vom 9. Mai 2020, 21:16

Hallo schmalen ,

die hängen von diesem Wert ab. Was steht da bei dir?

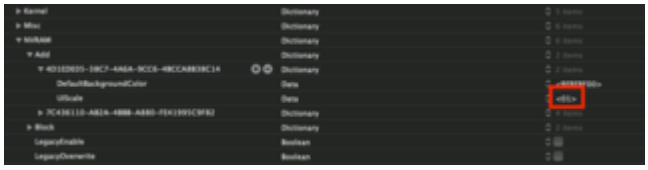

Hallo drombo ,

hast du schon mal mit diesen beiden Optionen gespielt?

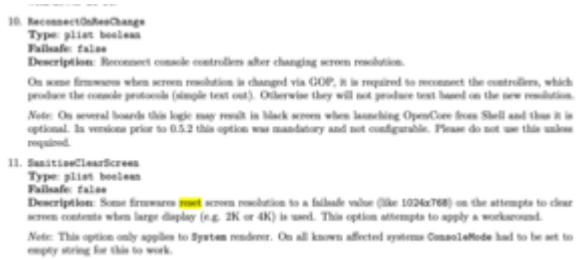

10. **ReconnectOnResChange**
    Type: `plist boolean`
    Failsafe: `false`
    Description: Reconnect console controllers after changing screen resolution.

    On some firmwares when screen resolution is changed via GOP, it is required to reconnect the controllers, which produce the console protocols (simple text out). Otherwise they will not produce text based on the new resolution.

    Note: On several boards this logic may result in black screen when launching OpenCore from Shell and thus it is optional. In versions prior to 0.5.2 this option was mandatory and not configurable. Please do not use this unless required.
11. **SanitiseClearScreen**
    Type: `plist boolean`
    Failsafe: `false`
    Description: Some firmwares reset screen resolution to a failsafe value (like 1024x768) on the attempts to clear screen contents when large display (e.g. 2K or 4K) is used. This option attempts to apply a workaround.

    Note: This option only applies to **System** renderer. On all known affected systems **ConsoleMode** had to be set to empty string for this to work.