

# OpenCore Sammelthread (Hilfe und Diskussion)

Beitrag von „fabiosun“ vom 11. Oktober 2024, 06:46

[mhaeuser](#) Hi and thanks for your answer


Unload is an array where we can add some efi drivers we can search as you said

As strings? Or data or in which way?

Thank you again

Edit:

How to fill Unload tab here i mean.

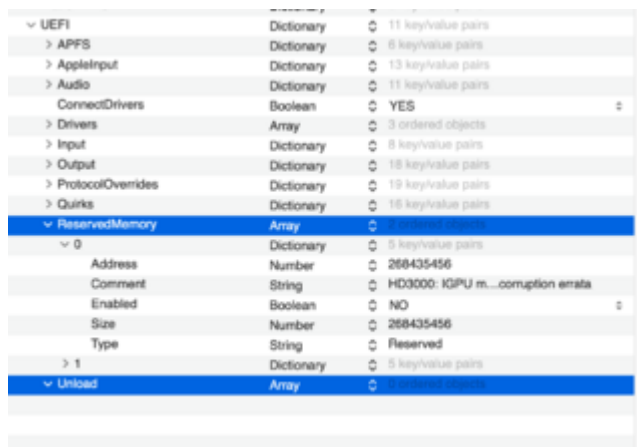

The screenshot shows the OpenCore configuration utility interface. The 'Unload' tab is selected and highlighted in blue. It displays an array of 0 ordered objects. The 'ReservedMemory' tab is also visible and highlighted in blue, showing a dictionary with 5 key/value pairs. The 'Drivers' tab is also visible, showing an array of 3 ordered objects.

Category	Type	Count
UEFI	Dictionary	11 key/value pairs
APFS	Dictionary	6 key/value pairs
AppleInput	Dictionary	13 key/value pairs
Audio	Dictionary	11 key/value pairs
ConnectDrivers	Boolean	YES
Drivers	Array	3 ordered objects
Input	Dictionary	8 key/value pairs
Output	Dictionary	18 key/value pairs
ProtocolOverrides	Dictionary	19 key/value pairs
Quirks	Dictionary	15 key/value pairs
ReservedMemory	Array	0 ordered objects
0	Dictionary	5 key/value pairs
Address	Number	268435456
Comment	String	HD0000: IGPU m... corruption errata
Enabled	Boolean	NO
Size	Number	268435456
Type	String	Reserved
1	Dictionary	5 key/value pairs
Unload	Array	0 ordered objects